



Freeze Protection Option Detail:

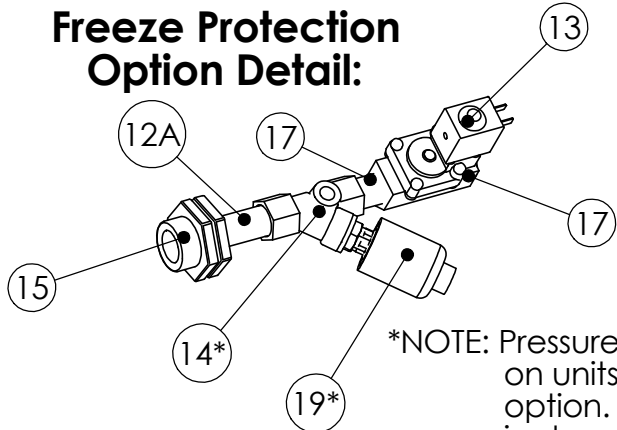

*NOTE: Pressure Switch is only installed on units with Freeze protection option. 1/4" connection on strainer is plugged in all standard non-freeze-protection cases.

*1st Hole: See table for Location Details

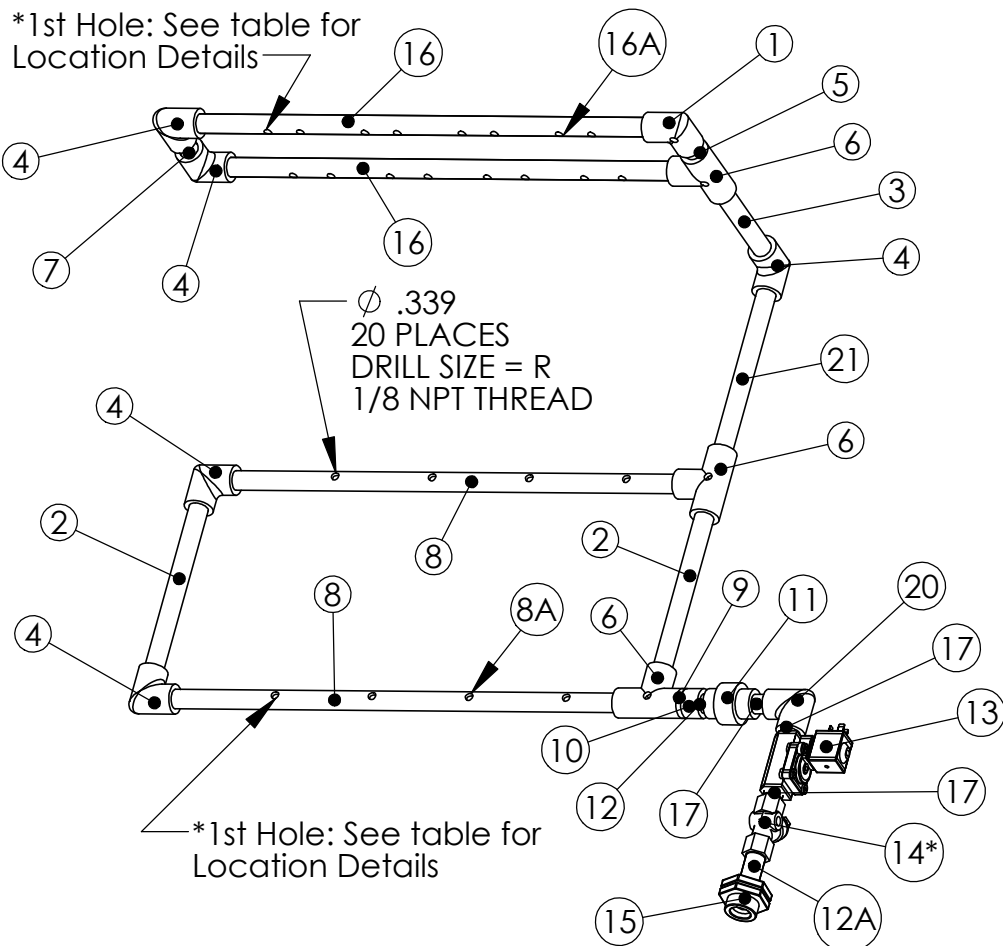

Spraybar Hole Locations

Spray Bar Type	1st Hole* distance to end (On Center)	Hole to hole spacing (On Center)	# of Holes on Bar (Not including Elbow or Tee)
Item # 8 - Lower SB	5.5"	4.5"	4
Item # 16 - Top SB	4.5"	4.5"	4

BILL OF MATERIALS

ITEM NUMBER	DESCRIPTION	QUANTITY
1	1/2" PVC SMOOTH ELBOW W/ NOZZLE HOLE	1
2	1/2" X 9-1/4" SMOOTH PVC PIPE	3
3	1/2 x 6" SMOOTH PVC PIPE	1
4	1/2" PVC SMOOTH ELBOW	6
5	1/2 X 2" SMOOTH PVC PIPE	1
6	1/2" SMOOTH PVC "T" W/ NOZZLE HOLE	3
7	1/2" X 2-1/4" SMOOTH PVC PIPE	1
8	1/2" X 22" SMOOTH PVC PIPE	2
8A	MEC270A W/ANTI-DRIP VALVE & NOZZLE (RED)	10
9	1/2" X 1-1/2" SMOOTH PVC PIPE	1
10	1/2" PVC MALE NPT X SOCKET	1
11	1/2" PVC NPT UNION	1
12	1/2" X 1-1/4" PVC CLOSE NPT NIPPLE	1
12A	1/2" X 4 1/2" NPT BRASS NIPPLE	1
13	L180B33Z610A 1/2" SOLENOID VALVE	1
14*	1/2" X 1/4" X 1/2" NPT STRAINER	1
15	1/2" QUICK SEAL (32-00002)	1
16	1/2" X 22-3/4" SMOOTH PVC PIPE	2
16A	CC-213 w/CC-929 NOZZLE	10
17	1/2" CLOSE NPT BRASS NIPPLE (4568K171)	3
19*	1/4" CONNECTION PRESSURE SWITCH (EC260)	1
20	1/2" BRASS NPT ELBOW	1
21	1/2" x 9-1/2" SMOOTH PVC PIPE	1

NOTES:

Max. Water Pressure: 50 psi. @ 70°F

Max. Water Temperature: 125°F

Max. Water Flow Rate: 6.5 GPH

Max. Recommended Water Hardness < 1 GPG or <17 ppm

Material: N/A
Blank Size: N/A x N/A
Weight: N/A lbs

Part Number: N/A
MACOLA Number: N/A
Drawing Name: EC 2 Tubing Assembly
Drawn By: WBG
Parent Assembly: EC 2
Sheet: 2 of 2

Unless Otherwise Specified
Dimensions are in Inches.

Standard Tolerances are:
Fractions: ±1/16
Decimal: .XX±.05
.XXX±.015
Angles: ±1°

CONFIDENTIAL