


MODEL #	NOMINAL SIZE (in) A x B x C	ACTUAL SIZE (in) A x B x C	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (in WC)	MEDIA AREA (sq ft)	MERV RATING
90801620	16 X 20 X 4	15.25 x 19.25 x 3.75	438	0.12	47	15
90802025	20 x 25 x 4	19.25 x 24.25 x 3.75	694	0.12	75	15
90801625	16 x 25 x 4	15.25 x 24.25 x 3.75	556	0.12	60	15

100% Synthetic Media
 Expanded Metal Screen on both sides of Filter
 24 ga Galvanized Steel Frame
 Gasketing ROGERS CORPORATION PORON Polyurethane - PORON 4701-40 Soft (3/16" T x 3/4" W)
 Testing for ASHRAE 52.2.2010
 Test Velocity 211 fpm
 Final Resistance: 0.5 in WC
 Rated Velocity: 211 fpm
 Max Velocity: 500 fpm
 Max Operating Temp: 200°F
 Underwriter Laboratory Classified
 UL 900 as to Flammability Only

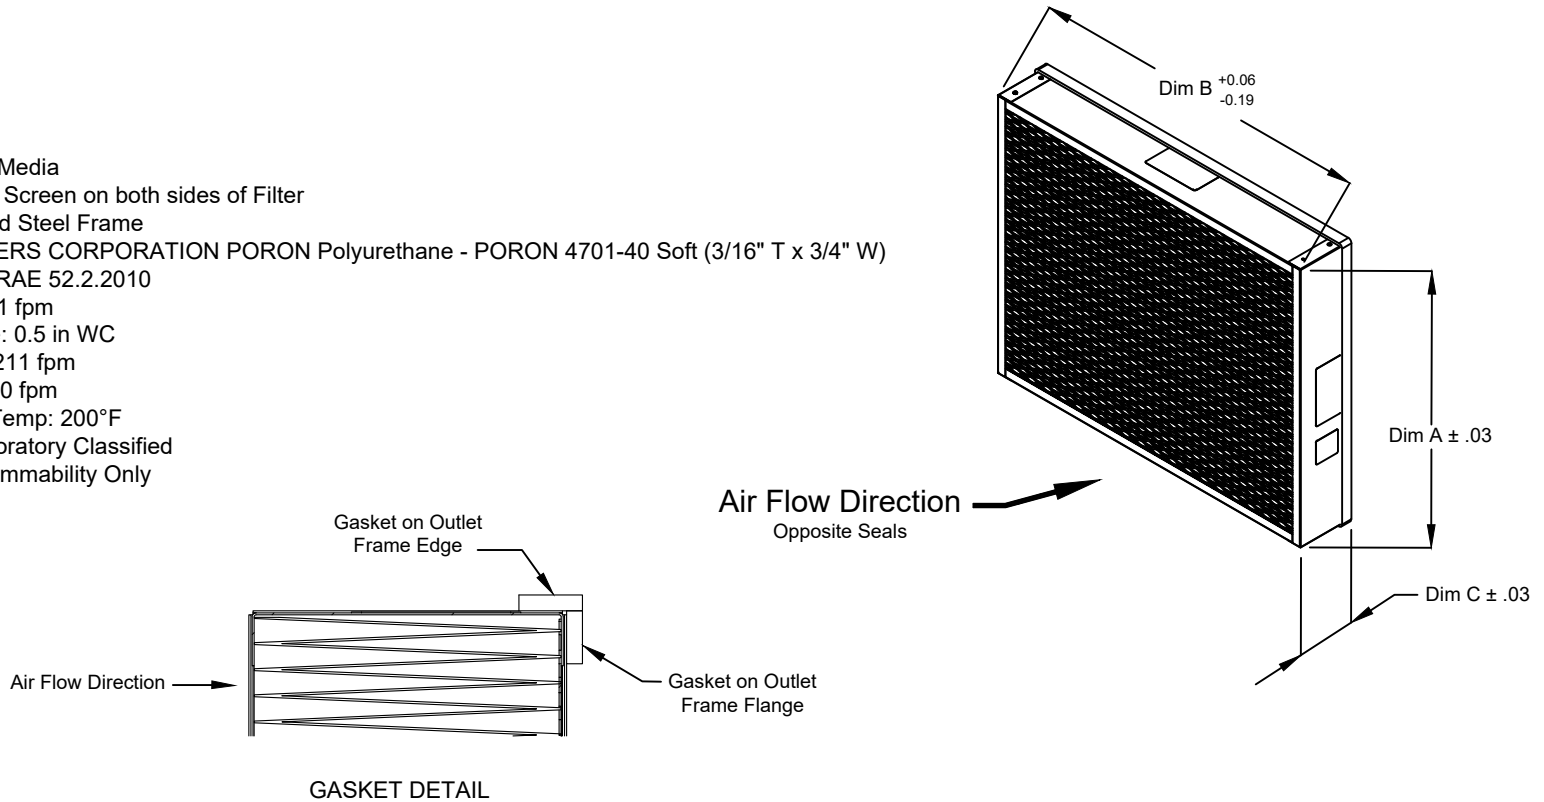

RESEARCH PRODUCTS CORPORATION

HEAF

90-2237
DRAWING NUMBER

B
REV