



Series 20/30 & 21/31 Condensed Catalog

Electronic Modulation Gas-Fired Temperature Controls Indirect Fired Applications

Selectra® systems from Maxitrol maintain precise, stable gas-fired temperatures. Selectra's unique electronic Modulator-Regulator valves control gas flow with instantaneous response and continual adjustment. They are the superior alternative to mod motors and butterfly valves.

OEM or retrofit applications include environmental climate control, as well as industrial or commercial heating processes. All fuel gases are compatible - capacities to 1,000,000 Btu/h.

Available standard companion electronics include temperature selectors, amplifiers, and temperature sensors, in a variety of configurations. The amplifier supplies output voltage to the MR valve.

Space Heating Applications - Series 20/30 System

Selectra® Series 20/30 systems are designed primarily for commercial and light industrial space heating, as components of indirect fired units with atmospheric burners.

The Series 20 is designed for single furnace operation, and the Series 30 is capable of handling up to four furnaces.

A wall mounted Selectrastat® senses space temperature and has an integral selector. Standard temperature adjustment range 60° to 85° F.

Amplifiers are available with high-fire ignition.

Also optional:

- A remote temperature sensor paired with a separate temperature selector can be substituted for the Selectrastat.

Make Up Air Applications - Series 21/31 System

Selectra® Series 21/31 systems are designed primarily for make-up air heating, as components of indirect fired units with atmospheric burners.

The Series 21 is designed for single furnace operation, and the Series 31 is capable of handling up to four furnaces.

A discharge air temperature sensor is mounted within a mixing tube housing. Standard temperature adjustment range 55° to 90° F.

Amplifiers are available with options such as high-fire ignition and integral or remote temperature selection.


Also optional:

- A room override thermostat provides space temperature control by raising the discharge air temperature to a pre-selected point - when used in conjunction with the remote temperature selector.
- An inlet air sensor (and mixing tube) provides inverse change in discharge air for each degree change in inlet air - when installed in a convenient duct location upstream of the burner.




Space Heating Applications - Series 20/30 System


Series 20/30 Basic System			Options	
Valves	Amplifier	Selectrstat	Space Temperature Selector	Space Temperature Sensor
MR410, MR510 & MR610 (see pg. 4)	A1010A, B or A1011A, B	T120	TD120	TS120



A1010
Amplifier

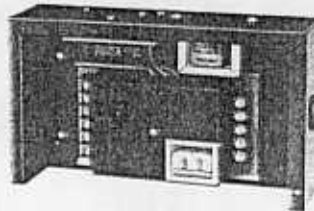


A1011
Amplifier



T120
Selectrstat



TD120
Space Temp. Selector



TS120
Space Temp. Sensor

Series 20 Amplifiers:

A1010A - single furnace
A1010B - w/ high fire ignition

Series 30 Amplifiers:

A1011A - multiple furnace
A1011B - w/ high fire ignition

Modulator-Regulator Valves:

MR410 (3/8" & 1/2" pipe size) Ⓢ
MR510 (1/2" & 3/4" pipe size) Ⓢ
MR610 (3/4" & 1" pipe size) Ⓢ



H-1 models for higher outlet pressure
(such as for LP applications) Ⓢ

Ⓢ CSA certified to Z21.18 and CAN 1-6.3-M82

Selectrstat: selector and integral sensing
T120 - (60° to 85° F) - *supersedes T107A-1*

or optional pair to replace Selectrstat:

Space Temperature Selector: selection only
TD120 (60° to 85° F) - *supersedes TD107A*

Optional: ETD-1 enclosure,

EFP-1 cover plate only - no enclosure

Space Temperature Sensor: remote sensing
TS120 - *supersedes TS2003A*

Make Up Air Applications - Series 21/31 System

Series 21/31 Basic System					Options	
Valves	Amplifier	Selection Method	Remote Selector Model (if applicable)	Discharge Temp. Sensor	Override Stat	Inlet Air Sensor
MR410, MR510 & MR610 (see pg. 4)	A1010A, B or A1011A, B	Remote	TD121	TS121 / MT1 or 2	T115	TS10765
	A1010E, F or A1011E, F	Integral	—	TS121 / MT1 or 2	T115	TS10765

Note: Selector and sensor must have same temperature range to be compatible.



A1010 Amplifier




A1010E Amplifier




TD121 Remote Temp. Selector



TS10765A Inlet Air Sensor

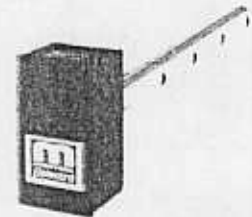

MT2/MTI Mixing Tube

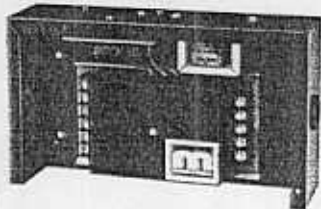

A1011 Amplifier



T115 Override Stat



TS121 Discharge Temp. Sensor

Series 21 Amplifiers (single furnace):
 A1010A - use with TD121
 A1010B - high fire ignition - use with TD121
 A1010E - integral temp. selector
 A1010F - integral temp. selector and high fire ignition

Series 31 Amplifiers (multiple furnace):
 A1011A - use with TD121
 A1011B - high fire ignition - use with TD121
 A1011E - integral temp. selector
 A1011F - integral temp. selector and high fire ignition

Modulator-Regulator Valves:

MR410 (3/8" & 1/2" pipe size) Ⓢ
 MR510 (1/2" & 3/4" pipe size) Ⓢ
 MR610 (3/4" & 1" pipe size) Ⓢ



H-1 models for higher outlet pressure (such as for LP applications) Ⓢ

Ⓢ CSA certified to Z21.18 and CAN 1-6.3-M82

Remote Temperature Selectors:

TD121 (55° to 90° F)
 TD121A (80° to 130° F)
 TD121B (120 to 170° F)
 TD121C (160° to 210° F)
 TD121D (200° to 250° F)
 TD121E (100° to 250° F)
 TD121F (40° to 80° F)

NOTE: Remote Selector and Discharge Temperature Sensor must have same temperature range to be compatible.

Optional: ETD-1 enclosure,
 EFP-1 cover plate only - no enclosure

Discharge Air Temperature Sensors: use with Mixing Tube

TS121 (55° to 90° F)
 TS121A (80° to 130° F)
 TS121B (120° to 170° F)
 TS121C (160° to 210° F)
 TS121D (200° to 250° F)
 TS121E (100° to 250° F)
 TS121F (40° to 80° F)

Mixing Tubes: use with Sensors

MT1-9 or 2-9 (9" length)
 MT1-12 or 2-12 (12" length)
 MT1-23 or 2-23 (23" length)
 MT1-28 or 2-28 (28" length)
 MT1-57 (57" length)

Optional:

Inlet Air Temperature Sensors: use with Mixing Tube

TS10765A (3:1 ratio) - *supersedes TS1007A*
 TS10765B (5:1 ratio) - *supersedes TS1007B*
 TS10765C (3.5:1 ratio) - *supersedes TS1007C*

Override Stat: (use only with TD121)

T115 (40° to 90° F)

Pressures, Dimensions

Valve Dimensions - in inches (millimeters)


Dimensions are to be used only as an aid in designing clearance for the valve.
Actual production dimensions may vary somewhat from those shown.

Model Number	Swing Radius	Call-Outs			
		A	B	C	D
MR410	3.1 (79)	3.9 (100)	2 (51)	2.1 (54)	.9 (24)
MR510	4.3 (109)	5.3 (135)	3.25 (83)	3.4 (86)	1.2 (30)
MR610	7.2 (183)	7.1 (180)	3.9 (99)	4 (102)	1.5 (37)



MR410, MR510, MR610 - CSA tested for 1/2 psi inlet pressure.
Maxitrol tested for 1 psi maximum operating inlet pressure.

See Bulletin MT2035 for additional valve information.

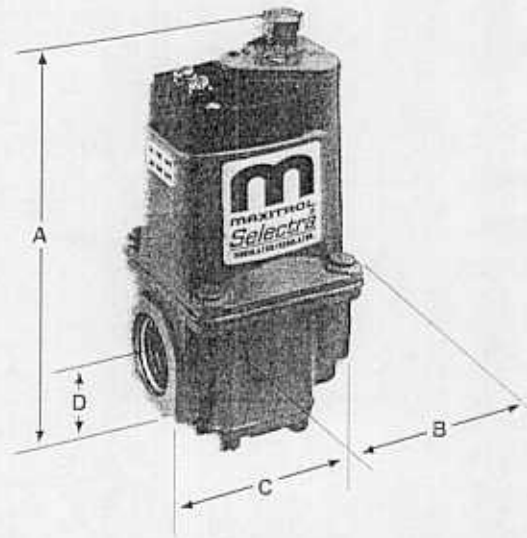

MR410, MR510, MR610

Component Dimensions - width x height x depth, in inches (millimeters)

Series 20/30 System	Series 21/31 System
A1010 Amplifier 6" (152) x 3.5" (89) x 1.88" (48)	A1010 Amplifier 6" (152) x 3.5" (89) x 1.88" (48)
A1011 Amplifier 9.5" (241) x 5.5" (140) x 2.5" (64)	A1011 Amplifier 9.5" (241) x 5.5" (140) x 2.5" (64)
T120 Selectrastat 2.56" (65) x 4.5" (114) x 1.79" (46)	TD121 Remote Temp. Selector 2.62" (67) x 2.62" (67) x 1.75" (44)
TD120 Space Temp. Selector 2.62" (67) x 2.62" (67) x 1.75" (44)	T115 Override Stat 2.96" (75) x 4.69" (119) x 2.56" (65)
TS120 Space Temp. Sensor 2.56" (65) x 4.5" (114) x 1.53" (39)	ETD-1 (opt. TD121 enclosure), MT1 Mixing Tube enclosure (for sensor) 4.19" (106) x 4.19" (106) x 1.88" (48) [Tube lengths: 9" (229), 12" (305), 23" (584), 28" (711), 57" (1448)]
	MT2 Mixing Tube enclosure (for sensor) 2.19" (56) x 4.19" (106) x 1.88" (48) [Tube lengths: 9" (229), 12" (305), 23" (584), 28" (711)]

Dimensions are to be used only as an aid in designing clearance. Actual production dimensions may vary somewhat from those shown.

A copyrighted publication of

MAXITROL®



Maxitrol Co. USA

23555 TELEGRAPH RD. • P.O. BOX 2230
SOUTHFIELD, MI 48037-2230

248/356-1400 • FAX 248/356-0829

WWW.MAXITROL.COM • E-MAIL: INFO@MAXITROL.COM



Mertik Maxitrol GmbH & Co. KG

INDUSTRIESTRASSE 1 48308 SENDEN, GERMANY
49-2597-9632-0 • FAX 49-2597-9632-99

WARNSTEDTERSTRASSE 3 06502 THALE, GERMANY
49-3947-400-0 • FAX 49-3947-400-200

E-MAIL: INFO@MERTIKMAXITROL.DE

LITHO IN U.S.A. 3MMP